

INDUSTRIAL COATINGS, MAINTENANCE & SAFETY

RUST-OLEUM[®]

BUILDING MAINTENANCE & SAFETY RANGE



**FLOOR
COATINGS**



**ANTI SLIP
FLOOR COATINGS**



**REPAIR
PRODUCTS**



**QUICK ANTI SLIP
SOLUTIONS**



An **RPM** Company

KNOW-HOW TO PROTECT[®]

▶ RUST-OLEUM® OFFERS AN EXCELLENT SERVICE INCLUDING NEXT DAY DELIVERY, SITE VISITS, SPECIFICATIONS AND SAMPLES. PLEASE CONSULT US FOR ADVICE ON FLOOR PREPARATION, INCLUDING ACID ETCHING AND VACUUM SHOT-BLASTING. DETAILED PRODUCT DATASHEETS ARE AVAILABLE FOR MOST PRODUCTS THAT WE MANUFACTURE.

5500 EPOXY HIGH BUILD

High build, solvent-free epoxy floor paint for garages, warehouses, showrooms, corridors, indoor car parks, workshops etc. Optimal protection in only one or two layers.

- High build coating, very durable
- Suitable for frequent cleaning with chemicals
- Excellent resistance against immersion
- 150 microns in a single layer
- Resistant to oils, solvents and many chemicals
- Approved for direct dry food contact at room temperature or below
- Class 1 surface spread of flame - BS 476 part 7

Size available: 4 litres



Light Green	Dunes Tan	White RAL 9010
Light Ivory RAL 1015	Light Blue	Steel Grey RAL 7001

Solvent free

Safety yellow and white may also be used for line marking

FLOOR PAINT

Dustproofs, seals and transforms drab concrete floors. It is easy to apply and dries quickly to a tough, mid-gloss finish.

Rust-Oleum® Floor Paint is an attractive, practical finish for concrete floors. Two coats applied by roller will seal and protect concrete from spillages.

- Single pack polyurethane formulation
- Easy to clean
- No primer required
- Easy to apply and fast drying
- Polyurethane formulation

Usage rate: Up to 40m² per 5 litres per coat (two coats normally required)

Size available: 5 litres

Safety Yellow	Tile Red	Mid Green	Mid Blue
White	Light Grey	Mid Grey	Dark Grey

FLOOR PAINT EPOXY ESTER GRADE

Dustproofs, seals and transforms drab concrete floors. Easy to apply and dries quickly to a tough, mid-gloss finish

Rust-Oleum® Floor Paint Epoxy Ester Grade is based on the Rust-Oleum® Floor Paint formula but it has been reinforced with Epoxy Ester. This improves durability and adhesion making it ideal for general industrial use.

- Single pack
- Hard wearing
- Easy to clean
- No primer required
- Good resistance to oils, petrol and detergent

Usage rate: Up to 40m² per 5 litres per coat (two coats normally required)

Size available: 5 litres



Safety Yellow	Tile Red	Mid Green	Mid Blue
Mid Grey	Light Grey	Dark Grey	

5421 EPOXY FLOOR PRIMER RAPID

Rapid curing impregnation primer for floors.

- Overcoatable after just 4 hours: apply primer and topcoat in one day!
- Improves adhesion on brittle and porous surfaces
- 100% solids
- Low odour
- 2 components (base and activator) in 1 can
- Can be coated with all two pack polyurethanes and epoxies

Size available: 5 litres



Transparent

FLOOR COATINGS

ANTI SLIP FLOOR COATINGS

REPAIR PRODUCTS

QUICK ANTI SLIP SOLUTIONS

3366 EPOXY POWERFLOAT FLOOR PRIMER RAPID

Rapid curing primer for use on smooth floors, like power-floated concrete and tiles.

- Overcoatable after just 3 hours: apply primer and topcoat in one day!
- Light grey colour to increase opacity of the next layers
- Water-based so no odour and safe to use
- Excellent flow
- 2 components (base and activator) in 1 can

Size available: 5 litres

Light Grey

Solvent free



5800 EPOXY RAPID WB

Rapid curing epoxy floor paint for inside use. For garages, warehouses, showrooms, corridors, indoor car parks, workshops etc.

- Overcoatable after just 3 hours
- Available in matt or gloss finish
- Water-based, so no odour and safe to use
- Good chemical and wear resistance
- Excellent flow
- Nice smooth finish
- Easy to clean
- Ample application time (4 hours)

Size available: 5 litres

Tile Red	Dark Grey RAL 7016	White RAL 9010
Light Ivory RAL 1015	Mid Grey RAL 7001	Light Grey RAL 7035



5220 EPOXYSHIELD® SEALER

The excellent dust-proofer. Water based, cost effective, quick drying

- Single pack, easy to apply
- Non yellowing clear finish (gloss)
- Protects against moisture and road salts
- Touch dry after just 1 hour
- Ideal primer for EpoxyShield® ULTRA coatings

Usage rate: Up to 30m² per 5 litres per coat (one coat normally sufficient)

Size available: 5 and 25 litres



SUPERGRIP™ SAFE-T-EPOXY

SuperGrip™ Safe-T-Epoxy contains fine, traction-enhancing particles embedded in a tough epoxy resin coating. The product has been independently tested for its anti slip properties.

- Easily applied by roller to concrete and stone
- Chemical and wear resistant
- Non-flammable, solvent-free and virtually odour-free

Usage rate: Up to 30m² per 5 litres per coat (two coats normally required)

Size available: 5 litres

**IDEAL FOR
LARGE AREAS**



- Tile Red
- Mid Grey
- Light Grey
- Safety Yellow



SUPERGRIP™ TREADSAFE

SuperGrip™ Treadsafe is solvent free and virtually odour free. It is easily applied by roller in one thick, tough coat. SuperGrip™ Treadsafe is finished by rolling in hard-wearing carborundum particles which will easily withstand very heavy traffic including forklift trucks and harsh chemicals. Ideal for use on floors, stairs, ramps, loading bays, boatdecks etc.

- Coarse anti slip surface
- Tough, long lasting finish
- Easy to apply
- Solvent-free and virtually odourless
- One coat application
- External and internal use

Usage rate: 5m² per pack (only one coat is necessary)

Size available: 5m²

- Mid Blue
- Safety Green
- Black
- Mid Grey
- Safety Red
- Safety Yellow

A coat of Rust-Oleum® Epoxy Floor Paint safety yellow is recommended on darker or bare concrete prior to applying SuperGrip™ Treadsafe safety yellow.



**Ideal for a heavy
duty, coarse
anti slip surface**

FLOOR PAINT SLIP RESISTANT GRADE

Dustproofs, seals and transforms drab concrete floors. Easy to apply and dries quickly to a tough, slip-resistant finish

Rust-Oleum® Floor Paint Slip Resistant Grade is ideal for slippery concrete floors. The anti slip aggregate is pre-blended with the paint to produce a more evenly textured finish. The texture is easier to clean than 'gritty' coatings making it particularly suitable for larger areas.

- Single pack polyurethane formulation
- No primer required

Usage rate: Up to 40m² per 5 litres per coat (two coats normally required)
Size available: 5 litres



- Safety Yellow
- Tile Red
- Mid Grey



TARMACOAT

Tarmaccoat is a tough, flexible acrylic paint for tarmac or asphalt

Colour and protect asphalt and tarmac drives, paths and play-grounds using this easy to apply coating. Also ideal for coating and line marking in plant rooms and general light industrial areas. One coat is generally sufficient - a second coat is recommended for rough, open textured surfaces or heavier wear areas.

- Seals and protects
- Easy to apply by brush or roller
- Resists UV and weathering
- Can be applied to damp surfaces
- Ideal for use inside and out
- Can also be used on concrete

Usage rate: Up to 20-30m² per 5 litres
Size available: 5 litres

Single Pack waterbased



5190 EPOXY REPAIR MORTAR DEEP FILL

Very strong epoxy repair mortar for quick and economical repair of deep holes in concrete floors. Stronger than concrete!

- Economical repair of deep holes in concrete floors
- Stands up to heavy traffic and many chemicals
- Does not shrink or crack
- Easy all-in-1 packaging
- For indoor and outdoor use
- Quickly back into service

Use 5401 tack primer wet-in-wet on porous substrates

Usage rate: 25kg covers 0,5m² at 30mm thickness

Size available: 25kg



ASPHALT RESTORER

A single application, black refurbishing coating for car parks, driveways and footpaths

Rust-Oleum® Asphalt Restorer provides an 'as new' appearance that will mask old line markings and repairs and will hide ingrained dust from building works etc.

- Upgrades drab, grey, stained asphalt
- Covers old line markings and repairs
- Avoids costly re-surfacing

Usage rate: Up to 10m² per 5 litres

Size available: 5 litres

Detailed product datasheets are available for all products



5110 VERTI PATCH

Very strong epoxy repair mortar with special lightweight fillers for repairing damaged vertical concrete, render and stone.

- Cures as hard as granite
- Can be overcoated quickly
- Ideal for use indoors or out
- Does not slump, shrink, lift or crack
- Apply at any depth without the need to build up layers
- Ideal for frost-spalled concrete surfaces with exposed reinforcement
- Easy all-in-1 packaging
- Can be drilled after curing

Usage rate: 2.5kg covers 0.6m² at 5mm thickness

Size available: 2.5kg

5401 EPOXY BOND

Epoxy impregnation primer for concrete and other porous, mineral surfaces. For use with Verti-Patch or Epoxy Repair Mortar.

Sizes available: 1 L or 5 L

FLOOR COATINGS

ANTI SLIP FLOOR COATINGS

REPAIR PRODUCTS

QUICK ANTI SLIP SOLUTIONS

EPOXY REPAIR MORTAR


Very strong epoxy repair mortar for repairing damaged floors. Stronger than concrete!

- Stands up to heavy traffic and many chemicals
- For repairing eroded or damaged concrete, bay edges and broken steps
- Does not shrink or crack
- Easy all-in-1 packaging
- For indoor and outdoor use
- Quickly back into service

Use 5401 tack primer wet-in-wet on porous substrates

Usage rate: 5kg covers 0.6m² at 5mm thickness

Sizes available: 2.5kg, 5kg and 25kg

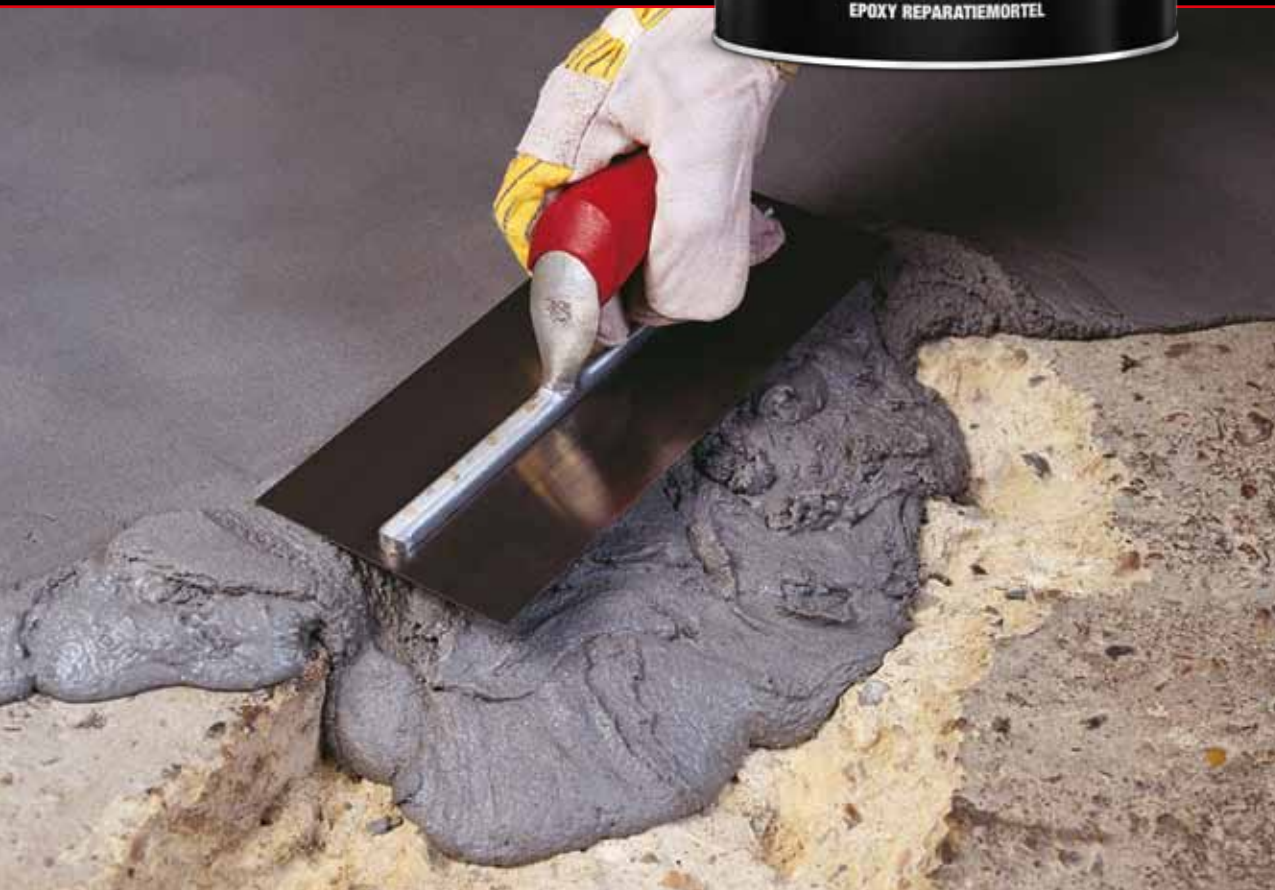

SPEED PATCH POURABLE GRADE

Quick setting, pourable patch repairs for heavily trafficked floors

A quick and easy way to fill holes in heavily used concrete floors inside and outside. No primer is required - just mix the powder with water and pour into the hole. This rapid setting concrete repair bonds to damp or dry surfaces and can be applied at thicknesses from feather edge to 100mm.

- Sets for foot traffic after 30 minutes and heavy traffic after 2 hours

Usage rate: 25kg covers 2.5m² at 5mm thickness

Size available: 25kg



SPEED PATCH

Fast setting, high strength concrete repair mortar provides a durable fast setting repair to frost spalled, eroded and cracked concrete, steps, troughs, ramps, coving etc.

- Cures as hard as granite
- Can be overcoated quickly
- Ideal for use indoors or out
- Ideal for frost-spalled concrete surfaces with exposed reinforcement
- Easy all-in-1 packaging

Can be drilled after curing.

Usage rate:
10kg covers 0.5m²
at 10mm thickness

Sizes available:
10kg and 20kg



FLOOR COATINGS

ANTI SLIP FLOOR COATINGS

REPAIR PRODUCTS

QUICK ANTI SLIP SOLUTIONS

SPEED SCREED

Rust-Oleum® Speed Screed is a pourable, durable re-surfacing material which smooths uneven, damaged or worn concrete floors

Rough concrete floors can be transformed rapidly and easily with this self-smoothing, hard wearing material designed to meet the demands of industrial use. Rust-Oleum® Speed Screed is pre-blended for easy mixing and fast application, and it provides a mid grey, non-dusting, slip-resistant surface that requires no further treatment before use. A mixing paddle for an electric drill and a spiked roller are necessary for use with this product (also available from Rust-Oleum®).

- Extremely durable
- Can be painted with any of Rust-Oleum® epoxy resin coatings
- Apply from 3mm to 15mm thick
- Suitable for interior or exterior use

Usage rate: 25kg covers 3.7m² at 3mm thickness

Size available: 25kg



Detailed product datasheets are available for all products

Rust-Oleum® EpoxyShield® Crack Filler is a liquid epoxy resin for filling narrow cracks in concrete floors

- Fast curing
- Quick and easy to apply
- Economical in use
- Solvent free
- Non-shrink

Usage rate: 500ml will fill approximately 25 linear metres of a crack 2mm wide and 5mm deep. (Cracks will vary in dimensions so figures cannot be precise).

Size available: 500ml

Solvent free



FINE CRACK REPAIR MORTAR



5160 FLEXI-JOINT FILL

Pourable flexible polyurethane joint filler with excellent wear and chemical resistance for expansion joints and other floor joints.

- Remains flexible to allow the floor to expand and collapse
- Quickly back into service; sealed joints accept traffic after 8-12 hours
- Stands up to heavy traffic and many chemicals
- For repairing or filling eroded or damaged expansion joints, concrete bay joints etc.
- Does not crack
- For indoor and outdoor use
- Low odour

Use 5161 Flexible Joint Primer to improve adhesion

Usage rate: 10m/L for a joint 1cm wide x 1cm deep
Size available: 2 litres

FLEXI-JOINT FILL PRIMER

Size available: 250ml
Sufficient for approx. 2 x 2 Litre packs of sealant

FLEXI-JOINT FILL RODS

Foam strips for packing into deep cracks before using Flexi-Joint Fill

Sizes available:
15mm, 20mm and 25mm diameter, all 10m long.



108 SURFA ETCH

Surface preparation. The basis for a perfect finish!
Etching solution.

- Assures good adhesion to smooth, densed floors and galvanised steel
- Neutralises alkaline contaminations
- To apply with a stiff nylon brush or a broom
- Ready after 15 minutes, clean with water

Size available: 5 litres



6-8 m²/l.



Also works as a high strength patio cleaner

ANTI SLIP TREAD

Self-adhesive anti slip cleats for improved safety on stairs

Rust-Oleum® SuperGrip™ Anti Slip Treads are self-adhesive panels that are easily applied to most smooth surfaces. They give an anti slip finish to improve safety on concrete, metal or wood surfaces.

Size available: Pack of 10, 610mm x 150mm. Available in black and clear.



Black Clear

ND14 CLEANER/DEGREASER

Concentrated, alkaline, non-flammable, virtually odour free cleaning and degreasing solution.

- Removes grease, oil, proteins, dirt and many other contaminants from coated, mineral and metal substrates
- Use as additive for high pressure cleaning
- Low concentration is sufficient (3-5%)
- Non-flammable, virtually odour-free
- Can also be applied by brush, mop or broom

We offer advice on floor preparation including site visits



Solvent free



ANTI-SLIP TREAD ROLL

Self-adhesive anti slip strip for wide steps, loading bay edges etc.

A bulk roll of 150mm wide anti slip material. Anti Slip Tread Roll is based on a self adhesive PVC backing with a tough aluminium oxide grit which is easily cut to fit. Easily applied to most smooth surfaces for a quick and economical anti slip solution.

Size available: 18m long x 150mm wide roll



Detailed product datasheets are available for all products



FLOOR COATINGS

ANTI SLIP FLOOR COATINGS

REPAIR PRODUCTS



QUICK ANTI SLIP SOLUTIONS

ANTI SLIP TAPES

A self-adhesive anti slip surface for steps, ramps, floors, vehicles etc.

Rust-Oleum® Anti Slip Tape provides an instant slip resistant surface for steps, ramps, floors, vehicles, boats etc. Available in a range of 5 colours and 3 lengths. Formed with hard aluminium oxide grit which is resin bonded to a flexible PVC backing. These tapes are a quick and easy way to reduce slip hazards at your workplace, and can be used inside or out.

Sizes available:
18m x 50mm roll
10m x 50mm roll
5m x 50mm roll

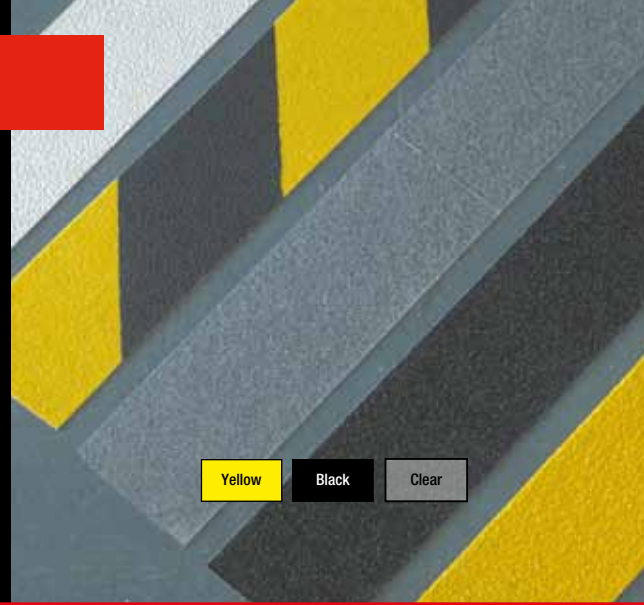

HAZARD ANTI SLIP TAPE

Eye catching yellow and black stripes - our most popular tape

- Easy to cut
- Easy to stick
- Easy to prevent slips and trips around your premises

Sizes available:
18m x 50mm roll
10m x 50mm roll
5m x 50mm roll



AQUA ANTI SLIP TAPE

SuperGrip™ Anti Slip Tape 'Aqua' (White) has a softer texture and is available for barefoot areas such as showers, pool surrounds etc.

Sizes available:
18m x 50mm roll
10m x 50mm roll
5m x 50mm roll





ANTI SLIP SHEETING

Heavy duty GRP sheets with a tough anti slip surface.

Highly versatile and long-lasting 4mm thick fibreglass sheets for ramps, walkways, bridges, machine shop floors etc. Easily fixed in place with Rust-Oleum® Adhesive Mastic or drill and screw to substrate.

- Tough carborundum particles resin-bonded to a fibreglass base
- Highly resistant to wear, chemicals and UV radiation
- Ideal for areas in constant use that cannot be closed off for a liquid anti slip coating
- Excellent slip resistance - even in wet or oily conditions
- Easily cut with a hacksaw or abrasive disc

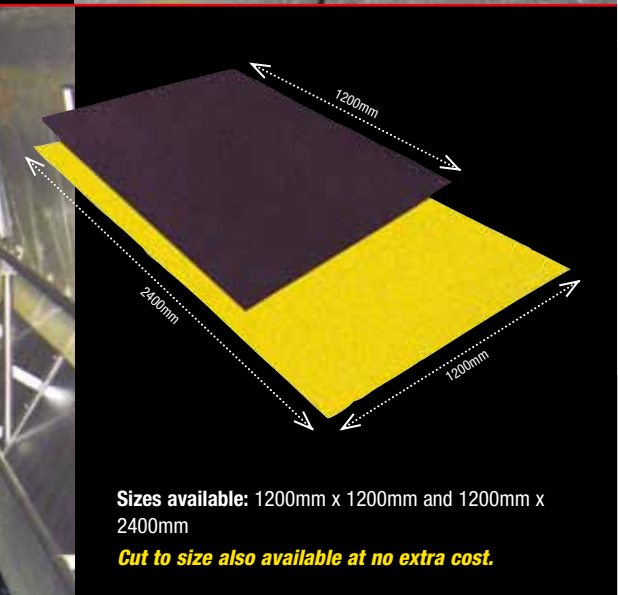

Sizes available: 1200mm x 1200mm and 1200mm x 2400mm

Cut to size also available at no extra cost.

ADHESIVE MASTIC

SuperGrip™ GRP can be glued to dry surfaces using this gap filling adhesive. Fits a standard cartridge mastic gun. As a guide, allow one tube per 1200 x 2400mm sheet

Size available: 310ml cartridge

ANTI SLIP STEP EDGE

Heavy duty, high visibility, slip-resistant GRP step nosing

A virtually indestructible fibreglass step nosing available in Medium Grade for internal use or Coarse Grade for external use. Fit to steps, loading bays, etc to highlight edges. Screw fix in conjunction with SuperGrip™ Adhesive Mastic. Available in a variety of lengths and two alternative profiles.

- All sizes available in external (coarse) and internal (medium) anti slip finish
- Easy to cut and drill on site
- Will not warp or rot
- Chamfered back edge to reduce trip hazard
- Photoluminescent also available

Sizes available: 1000mm, 1500mm, 2000mm and 3000mm
 Lengths with either a 70mm x 30mm or 55mm x 55mm profile

Cut to size also available (max 3000mm length)


ADHESIVE MASTIC

SuperGrip™ GRP can be glued to dry surfaces using this gap filling adhesive. Fits a standard cartridge mastic gun.

Size available: 310ml cartridge will fix approximately 12 linear metres of Anti Slip Step Edge.



MORE SIZES NOW AVAILABLE

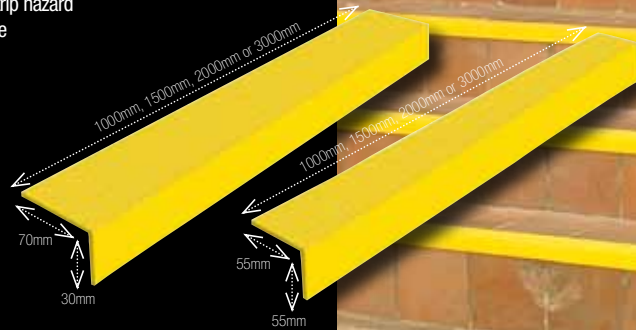

Yellow White

**Coarse Grade
Outdoors**

**Medium Grade
Indoors**

ANTI SLIP DECKING CLEATS


Tough, weatherproof strips to give existing wooden decking a slip resistant surface

A quick, attractive and long-lasting solution for slippery wooden decking.

- Tough, 4mm thick GRP base
- Coarse grit surface for maximum slip resistance (not suitable for barefoot areas)
- Ideal for marinas, parks, balconies, patio areas etc.
- Easily trimmed to fit using a hacksaw
- Chamfered edge reduces trip hazards

Sizes available:
 50mm, 90mm or 120mm wide
 1200mm or 2400mm long

NEW PROFILE

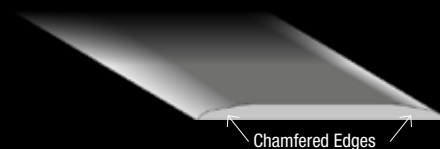

Chamfered Edges

Stone Black

Highly versatile, heavy duty GRP preformed step covers with nosing

Provides a corrosion-resistant fibreglass surface for damaged or worn areas.

- Will tolerate heavy wear and all weather conditions
- Easy to apply - can be glued or screw fixed
- Black tread with 55mm high visibility nosing to comply with Building Regulations Approved Document M
- Excellent slip resistance even when wet or oily
- Ideal for use inside and out

Black tread with yellow or white 55mm nosing
 Also available in stone colour (without highlighted nosing)

Standard sizes:

Lengths: 600, 750, 800, 1000, 1200, 1500, 2000 or 3000mm
Depths: 220mm and 345mm

Cut to size also available - any size up to 3000mm x 345mm

ADHESIVE MASTIC

SuperGrip™ GRP can be glued to dry surfaces using this gap filling adhesive. Fits a standard cartridge mastic gun.

Size available: 310ml cartridge will fix approx. 12 linear metres of Anti Slip Step Covers.

ANTI SLIP STEP COVERS

FREE cut to size service



White Yellow Stone

ANTI SLIP LANDING COVERS

Highly versatile, heavy duty preformed landing covers with nosing

Provides a corrosion-resistant GRP surface for damaged or worn areas.


- Will tolerate heavy wear
- Easy to apply - can be glued or screw fixed
- Black tread with 55mm high visibility nosing
- Excellent slip resistance even in wet conditions
- Ideal for use inside and out

Available in black with yellow or white 55mm nosing

Standard sizes:

Lengths: 800, 1000, 1200, or 2400mm
Depth: 1200mm

Cut to size also available

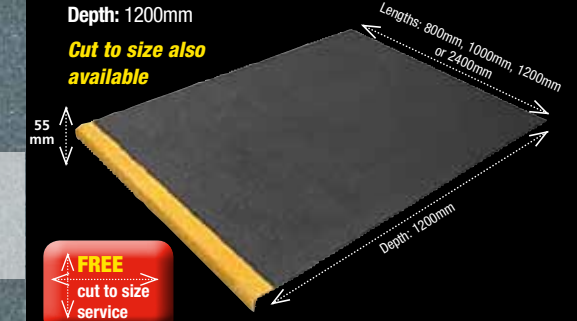

FREE cut to size service

FREE cut to size service

ADHESIVE MASTIC

SuperGrip™ GRP can be glued to dry surfaces using this gap filling adhesive. Fits a standard cartridge mastic gun.

Size available: 310ml cartridge will fix approx. 2 x 1200mm long Landing Covers.

SEE FOR MORE INFORMATION:

WWW.ANGLOBUILD.CO.UK

WWW.RUST-OLEUM.EU

Your distributor:



Rust-Oleum® supplies specialist products for applications including: cleaning & preparation, surface treatment & coating, construction, repair & maintenance. Ask for details. The shades of certain colours may vary from product to product. Tile samples showing actual shades are available on request.

Rust-Oleum U.K. Ltd

PO Box 261 | Chester-le-Street | DH3 9EH United Kingdom | Tel 02476 717329 | Fax 02476 718930